


Mini IP Module Mainboard 42x42MM

Mode: B900M42 (with mini TF card slot)

PRICE:73.00USD/PC

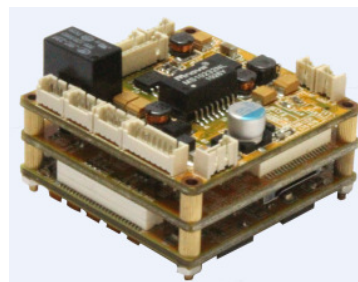

Specification:

Video Compression	H.264 Main Profile,
Dual-stream	Preferred, Alternate stream: H.264 & MJPEG optional
Video Definition	PAL:352*288(CIF),704*288(2CIF),704*576(D1); NTSC:352*240(CIF),704*240(2CIF),704*480(D1)
Video Parameters	Brightness, Hue, Contrast, Saturation, Image quality.
Streaming Format	Optional Video Streaming or Audio & Video composite Streaming
Video Frame Rate	PAL: 1-25frames/second ; NTSC:1-30frames/second
Video Compression Bit rate	32Kbit/S~16Mbit/S
Audio Input	1channel,linear input
Audio Compression	G.726, G.711,
Audio Output	1channel,RCA interface, linear output
Audio talk-back	Built-in Audio I/O port
Supported Protocols	IP/TCP, UDP, HTTP, FTP, DHCP, DNS,NTP, UPNP, RTP, RTSP, RTCP, PPPOE and so on.
System Interface	10M/100M self-adapting Ethernet port, 1 RS485 port,1 RS232 port TF card slot
Alarm Input	1channel on/off input,
Alarm Output	1 channel on/off output,120VAC 1A/24VDC 1A
Input Power Supply	DC 12V,1A
Maximum Power	Less than 6W
Operating Temperature	-10 ~ +55 °C
Storage Temperature	-20 ~ +70 °C
Operating Humidity	10 ~ 85%
Size	42x42x20mm
System Requirements	Operation System: Microsoft Windows 98/ME/2000/XP/2003/Vista/Windows 7 Browser: Microsoft Internet Explorer version 6, 7 or 8.

CCD IP Module

Model: B900 (with SD card slot)

Price: 73.00USD/PC




Specification:

Auto Iris Control	DC drive	
Video Compression	H.264 Main Profile 3.0	
Dual-stream	H.264 & MJPEG	
Video Definition	CCD	PAL:352*288(CIF),704*288(2CIF),704*576(D1); NTSC:352*240(CIF),704*240(2CIF),704*480(D1)
	CMOS	VGA: 640x480, QVGA: 320x240
Video Parameters	Brightness, Hue, Contrast, Saturation, Image quality.	
Streaming Format	Optional Video Streaming or Audio & Video composite Streaming	
Video Frame Rate	CCD	PAL: 1-25frames/second NTSC:1-30frames/second
	CMOS	1-30frames/second
Video Compression Bit rate	30Kbit/S~16Mbit/S	
Video Output	1 channel composite video output.	
Audio Input	1channel,linear input, Input Impedance:1KOhms	
Audio Compression	G.726, G.711, ADPCM	
Audio Output	1channel,RCA interface, linear output,	
Audio two-way talk	Built-in Audio I/O port	
Supported Protocols	TCP, UDP, IP, HTTP, FTP, SMTP, DHCP, DNS,ARP, ICMP, POP3, NTP, IPsec, UPNP,RTP,RTSP,RTCP	
System Interface	10M/100M self-adapting Ethernet port,	
	1 RS485 port,1 RS232 port (supports transparent protocols)	
	SD card slot	
Alarm Input	1channel on/off input, supporting NO (normally open) or NC (normally close) sense.	
Alarm Output	1 channel on/off output,120VAC 1A/24VDC 1A	
Input Power Supply	DC 12V,1A	
Maximum Power	Less than 6W	
Operating Temperature	-10 ~ +55℃	
Storage Temperature	-20 ~ +70 ℃	
Operating Humidity	10 ~ 85%	
Size	110x67mm	
System Requirements	Operation System: Microsoft Windows 98/ME/2000/XP/2003/Vista Browser: Microsoft Internet Explorer version 6, 7 or 8	

CCD IP Module

Model: B900(8) (without SD card slot)

Price: 73.00USD/PC

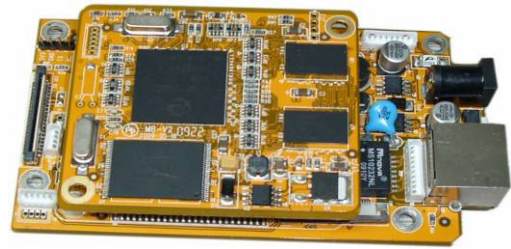

Specification:

Video Compression	H.264 Main Profile,
Dual-stream	Preferred, Alternate stream: H.264 & MJPEG optional
Video Definition	PAL:352*288(CIF),704*288(2CIF),704*576(D1); NTSC:352*240(CIF),704*240(2CIF),704*480(D1)
Video Parameters	Brightness, Hue, Contrast, Saturation, Image quality.
Streaming Format	Optional Video Streaming or Audio &Video composite Streaming
Video Frame Rate	PAL: 1-25frames/second NTSC:1-30frames/second
Video Compression Bit rate	30Kbit/S~16Mbit/S
Audio Compression	G.726, G.711, ADPCM,
Supported Protocols	TCP, UDP, IP, HTTP, FTP, SMTP, DHCP, DNS,ARP, ICMP, POP3, NTP, IPsec, UPNP,RTP,RTSP,RTCP
System Interface	10M/100M self-adapting Ethernet port, 1 RS485 port,1 RS232 port (supports transparent protocols)
Input Power Supply	DC 12V,1A
Maximum Power	Less than 6W
Operating Temperature	-10 ~ +55℃
Storage Temperature	-20 ~ +70 ℃
Operating Humidity	10 ~ 85%
Size	110x67mm
System Requirements	Operation System: Microsoft Windows 98/ME/2000/XP/2003/Vista Browser: Microsoft Internet Explorer version 6, 7 or 8.

CCD Mini IP Module 60*60MM
Mode: B900M (with mini TF card slot)

Price: 73.00USD/PC



Specification:

Video Compression	H.264 Main Profile,
Dual-stream	Preferred, Alternate stream: H.264 & MJPEG optional
Video Definition	PAL:352*288(CIF),704*288(2CIF),704*576(D1); NTSC:352*240(CIF),704*240(2CIF),704*480(D1)
Video Parameters	Brightness, Hue, Contrast, Saturation, Image quality.
Streaming Format	Optional Video Streaming or Audio &Video composite Streaming
Video Frame Rate	PAL: 1-25frames/second NTSC:1-30frames/second
Video Compression Bit rate	30Kbit/S~16Mbit/S
Audio Input	1channel,linear input
Audio Compression	G.726, G.711, ADPCM,
Audio Output	1channel,RCA interface, linear output
Audio talk-back	Built-in Audio I/O port
Supported Protocols	TCP, UDP, IP, HTTP, FTP, SMTP, DHCP, DNS,ARP, ICMP, POP3, NTP, IPsec, UPNP,RTP,RTSP,RTCP
System Interface	10M/100M self-adapting Ethernet port, 1 RS485 port,1 RS232 port (supports transparent protocols) TF card slot
Alarm Input	1channel on/off input, supporting NO (normally open) or NC (normally close) sense.
Alarm Output	1 channel on/off output,120VAC 1A/24VDC 1A
Input Power Supply	DC 12V,1A
Maximum Power	Less than 6W
Operating Temperature	-10 ~ +55℃
Storage Temperature	-20 ~ +70 ℃
Operating Humidity	10 ~ 85%
Size	60x60mm
System Requirements	Operation System: Microsoft Windows 98/ME/2000/XP/2003/Vista Browser: Microsoft Internet Explorer version 6, 7 or 8.